Standard Free-Standing 4C Horizontal Mailbox Configurations

MAXIMUM HEIGHT UNITS - STANDARD HEIGHT

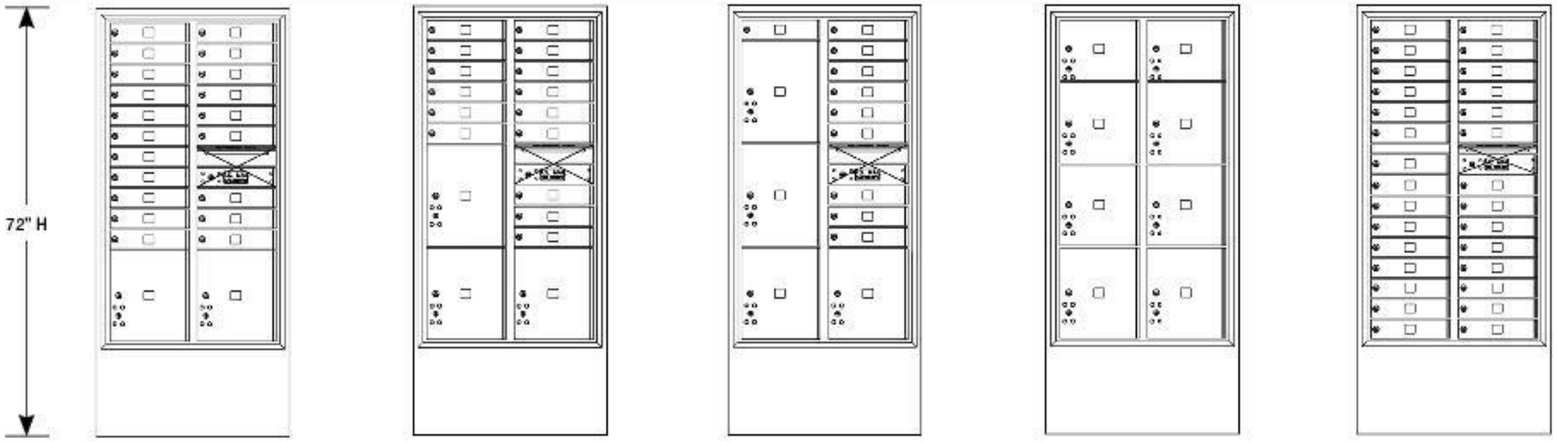

3916D-20
(20 MB1, 2 PL4.5, OM2)

3916D-15
(15 MB1, 2 PL4.5, 1 PL5, OM2)

3916D-10
(10 MB1, 2 PL4.5, 2 PL5, OM2)

3916D-8P
(2 PL3, 4 PL4, 2 PL4.5)

3916D-29[1]
(29 MB1, OM1.5)

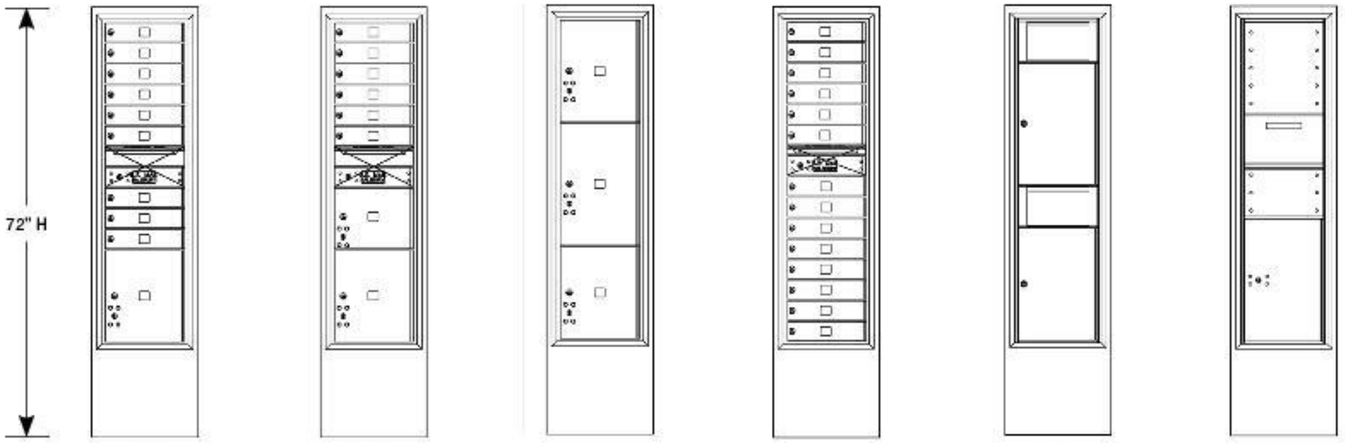

3916S-09
(9 MB1, 1 PL4.5, OM2)

3916S-06
(6 MB1, 1 PL3, 1 PL4.5, OM2)

3916S-3P
(1 PL4.5, 1 PL5, 1 PL6)

3916S-14[1]
(14 MB1, OM1.5)

3916S-2B[1]
(2 Receptacle Bins)

3916S-1C[1]
(1 Collection Box)

11 DOOR HIGH UNITSS - STANDARD HEIGHT

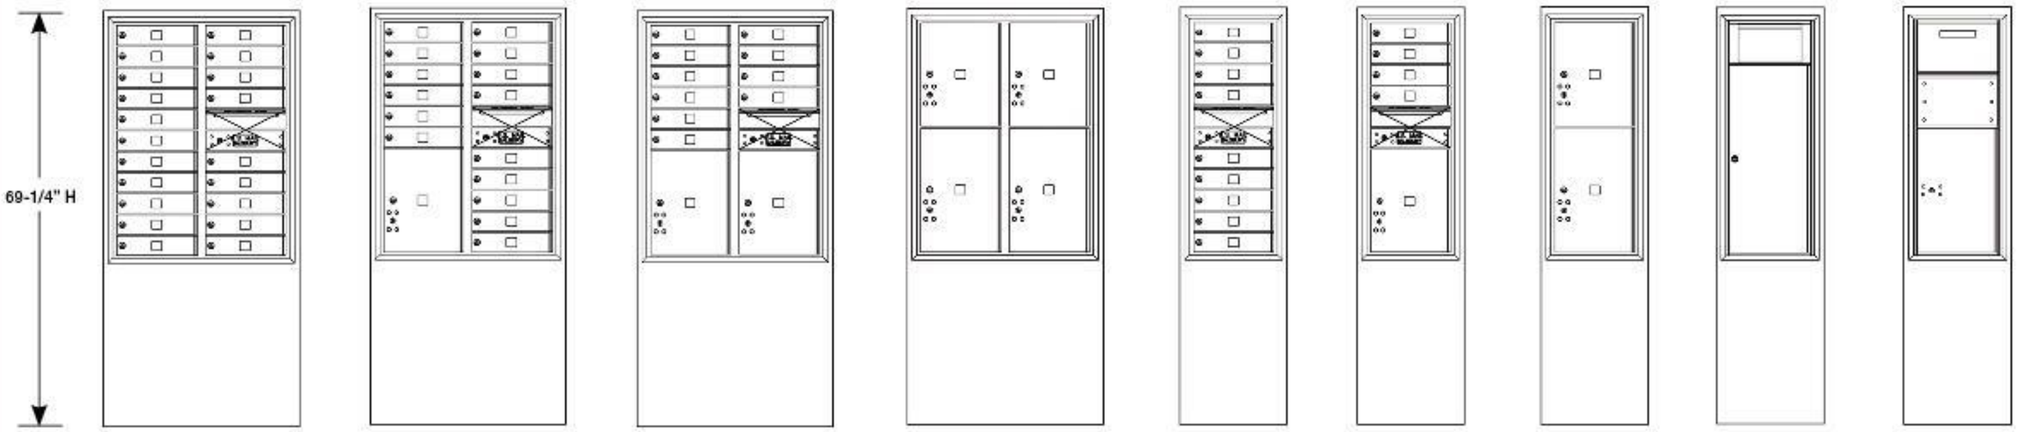

3911D-20
(20 MB1, OM2)

3911D-15
(15 MB1, 1 PL5, OM2)

3911D-10
(10 MB1, 2 PL5, OM2)

3911D-4P
(2 PL5, 2 PL6)

3911S-09
(9 MB1, OM2)

3911S-04
(4 MB1, 1 PL5, OM2)

3911S-2P
(1 PL5, 1 PL6)

3911S-1B[1]
(1 Receptacle Bin)

3911S-1C[1]
(1 Collection Box)

DOUBLE COLUMN WIDTH: 32-1/4" W
SINGLE COLUMN WIDTH: 17-1/2" W

MAILBOX DOOR SIZES:
MB1 - 13-1/4" W x 3-1/4" H
MB2 - 13-1/4" W x 6-3/4" H
MB3 - 13-1/4" W x 10-1/4" H
MB4 - 13-1/4" W x 13-3/4" H

PARCEL LOCKER DOOR SIZES:
PL3[2] - 13-1/4" W x 10-1/4" H
PL4[2] - 13-1/4" W x 13-3/4" H
PL4.5 - 13-1/4" W x 15-1/2" H
PL5 - 13-1/4" W x 17-1/4" H
PL6 - 13-1/4" W x 20-3/4" H



OUTGOING MAIL COMPARTMENT (OM2)

Note: Units (excluding stand-alone parcel lockers) include a two (2) door high compartment for outgoing mail collection.



OUTGOING MAIL COMPARTMENT (OM3)

Note: Units (excluding stand-alone parcel lockers) include a two (2) door high compartment for outgoing mail collection. The OM3 adds a fixed panel door directly below the OM2, but does not add extra capacity for mail collection.



OUTGOING MAIL COMPARTMENT (OM1.5)

Note: Both front loading and rear loading units include a one and a half (1.5) door high compartment for outgoing mail collection.



CARRIER ACCESS (CA) DOOR

Note: Carrier Access (CA) doors are only available for stand-alone parcel lockers and private use mailboxes.

Note: Salsbury Free-Standing 4C Horizontal Mailboxes include a U.S.P.S. approved 4C horizontal mailbox unit and a matching enclosure. For delivery of U.S. mail, contact your local postmaster for approval.

[1] These units do not meet U.S.P.S. installation requirements and are for private delivery only unless approved by local postal authorities.

[2] For private delivery, unless parcel locker ratio exceeds requirement. U.S.P.S. standard 4C requires a minimum of one parcel locker for every ten (10) tenant compartments. Parcel lockers must be a minimum of 15" high (PL4.5, PL5 and PL6) to meet the 1:10 ratio. Once this ratio has been met, smaller parcel lockers (PL3 and PL4) may also be added.

Standard Free-Standing 4C Horizontal Mailbox Configurations

10 DOOR HIGH UNITS - STANDARD HEIGHT (ADA Compliant)

52-3/4" H



3910D-10
(10 MB1, 1 PL4, 1 PL4.5, OM1.5)



3910D-09
(9 MB1, 1 PL4.5, 1 PL5, OM1.5)



3910D-06
(6 MB1, 2 PL6, OM2)



3910D-4P
(4 PL5)



3910S-04
(4 MB1, 1 PL4.5, OM1.5)



3910S-03
(3 MB1, 1 PL5, OM2)



3910S-2P
(2 PL5)



3910S-1B[1]
(1 Receptacle Bin)



3910S-1C[1]
(1 Collection Box)

6 DOOR HIGH UNITS - STANDARD HEIGHT (ADA Compliant)

51-3/4" H



3906D-10
(10 MB1, OM2)



3906D-09
(9 MB1, OM3)



3906D-05
(5 MB1, 1 PL5, OM2)



3906D-2P
(2 PL6)



3906S-04
(4 MB1, OM2)



3906S-03
(3 MB1, OM3)



3906S-1P
(1 PL6)

DOUBLE COLUMN WIDTH: 32-1/4" W
SINGLE COLUMN WIDTH: 17-1/2" W

MAILBOX DOOR SIZES:

MB1 - 13-1/4" W x 3-1/4" H
MB2 - 13-1/4" W x 6-3/4" H
MB3 - 13-1/4" W x 10-1/4" H
MB4 - 13-1/4" W x 13-3/4" H

PARCEL LOCKER DOOR SIZES:

PL3[2] - 13-1/4" W x 10-1/4" H
PL4[2] - 13-1/4" W x 13-3/4" H
PL4.5 - 13-1/4" W x 15-1/2" H
PL5 - 13-1/4" W x 17-1/4" H
PL6 - 13-1/4" W x 20-3/4" H



OUTGOING MAIL COMPARTMENT (OM2)

Note: Units (excluding stand-alone parcel lockers) include a two (2) door high compartment for outgoing mail collection.



OUTGOING MAIL COMPARTMENT (OM3)

Note: Units (excluding stand-alone parcel lockers) include a two (2) door high compartment for outgoing mail collection. The OM3 adds a fixed panel door directly below the OM2, but does not add extra capacity for mail collection.



OUTGOING MAIL COMPARTMENT (OM1.5)

Note: Both front loading and rear loading units include a one and a half (1.5) door high compartment for outgoing mail collection.



CARRIER ACCESS (CA) DOOR

Note: Carrier Access (CA) doors are only available for stand-alone parcel lockers and private use mailboxes.

Note: Salsbury Free-Standing 4C Horizontal Mailboxes include a U.S.P.S. approved 4C horizontal mailbox unit and a matching enclosure. For delivery of U.S. mail, contact your local postmaster for approval.

[1] These units do not meet U.S.P.S. installation requirements and are for private delivery only unless approved by local postal authorities.

[2] For private delivery, unless parcel locker ratio exceeds requirement. U.S.P.S. standard 4C requires a minimum of one parcel locker for every ten (10) tenant compartments. Parcel lockers must be a minimum of 15" high (PL4.5, PL5 and PL6) to meet the 1:10 ratio. Once this ratio has been met, smaller parcel lockers (PL3 and PL4) may also be added.