Standard Recessed Mounted 4C Horizontal Mailbox Configurations

MAXIMUM HEIGHT UNITS - STANDARD HEIGHT

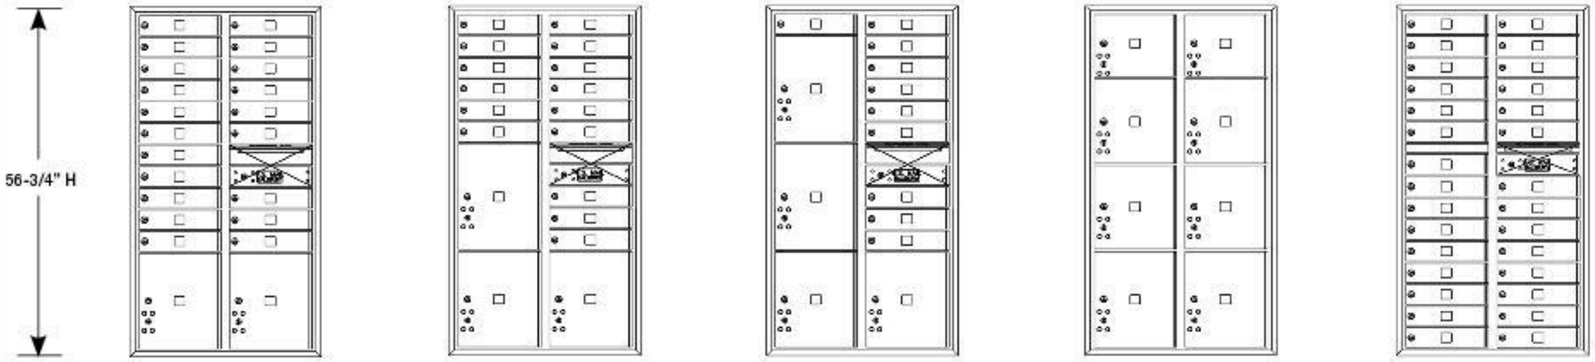

3716D-20
(20 MB1, 2 PL4.5, OM2)

3716D-15
(15 MB1, 2 PL4.5, 1 PL5, OM2)

3716D-10
(10 MB1, 2 PL4.5, 2 PL5, OM2)

3716D-8P
(2 PL3, 4 PL4, 2 PL4.5)

3716D-29[1]
(29 MB1, OM1.5)

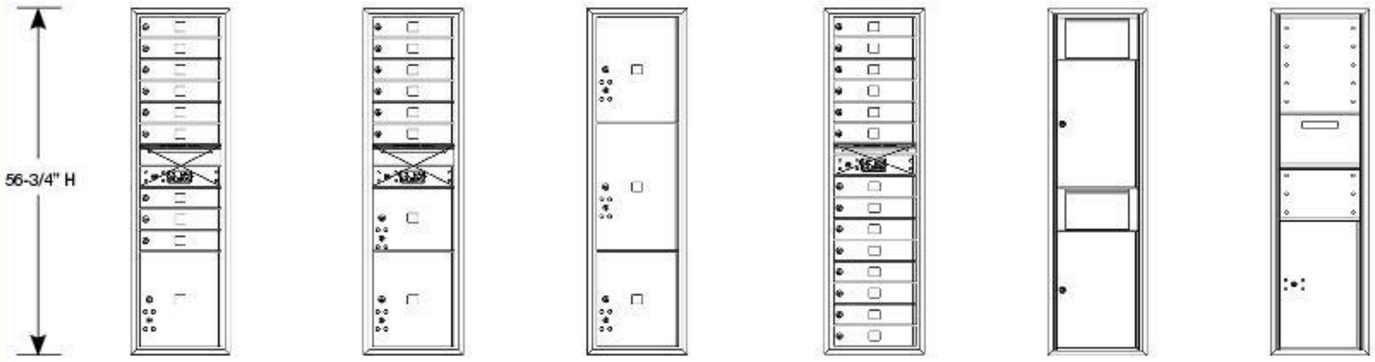

3716S-09
(9 MB1, 1 PL4.5, OM2)

3716S-06
(6 MB1, 1 PL3, 1 PL4.5, OM2)

3716S-3P
(1 PL4.5, 1 PL5, 1 PL6)

3716S-14[1]
(14 MB1, OM1.5)

3716S-2B[1]
(2 Receptacle Bins)

3716S-1C[1]
(1 Collection Box)

11 DOOR HIGH UNITS - STANDARD HEIGHT



3711D-20
(20 MB1, OM2)

3711D-15
(15 MB1, 1 PL5, OM2)

3711D-10
(10 MB1, 2 PL5, OM2)

3711D-4P
(2 PL5, 2 PL6)

3711S-09
(9 MB1, OM2)

3711S-04
(4 MB1, 1 PL5, OM2)

3711S-2P
(1 PL5, 1 PL6)

3711S-1B[1]
(1 Receptacle Bin)

3711S-1C[1]
(1 Collection Box)

DOUBLE COLUMN WIDTH: 31-1/8" W
SINGLE COLUMN WIDTH: 16-3/8" W

MAILBOX DOOR SIZES:

MB1 - 13-1/4" W x 3-1/4" H
MB2 - 13-1/4" W x 6-3/4" H
MB3 - 13-1/4" W x 10-1/4" H
MB4 - 13-1/4" W x 13-3/4" H

PARCEL LOCKER DOOR SIZES:

PL3[2] - 13-1/4" W x 10-1/4" H
PL4[2] - 13-1/4" W x 13-3/4" H
PL4.5 - 13-1/4" W x 15-1/2" H
PL5 - 13-1/4" W x 17-1/4" H
PL6 - 13-1/4" W x 20-3/4" H

OUTGOING MAIL COMPARTMENT (OM2)

Note: Units (excluding stand-alone parcel lockers) include a two (2) door high compartment for outgoing mail collection.

OUTGOING MAIL COMPARTMENT (OM3)

Note: Units (excluding stand-alone parcel lockers) include a two (2) door high compartment for outgoing mail collection. The OM3 adds a fixed panel door directly below the OM2, but does not add extra capacity for mail collection.

OUTGOING MAIL COMPARTMENT (OM1.5)

Note: Both front loading and rear loading units include a one and a half (1.5) door high compartment for outgoing mail collection.

CARRIER ACCESS (CA) DOOR

Note: Carrier Access (CA) doors are only available for stand-alone parcel lockers and private use mailboxes.

Note: Salsbury Recessed Mounted 4C Horizontal Mailboxes and parcel lockers have been U.S.P.S. approved and meet the specifications of USPS-STD-4C and are required for new construction and major renovations.

[1] These units do not meet U.S.P.S. installation requirements and are for private delivery only unless approved by local postal authorities.

[2] For private delivery, unless parcel locker ratio exceeds requirement. U.S.P.S. standard 4C requires a minimum of one parcel locker for every ten (10) tenant compartments. Parcel lockers must be a minimum of 15" high (PL4.5, PL5 and PL6) to meet the 1:10 ratio. Once this ratio has been met, smaller parcel lockers (PL3 and PL4) may also be added.

Standard Recessed Mounted 4C Horizontal Mailbox Configurations

10 DOOR HIGH UNITS - STANDARD HEIGHT (ADA Compliant)

37-1/2" H



3710D-10
(10 MB1, 1 PL4, 1 PL4.5, OM1.5)



3710D-09
(9 MB1, 1 PL4.5, 1 PL5, OM1.5)



3710D-06
(6 MB1, 2 PL6, OM2)



3710D-4P
(4 PL5)



3710S-04
(4 MB1, 1 PL4.5, OM1.5)



3710S-03
(3 MB1, 1 PL5, OM2)



3710S-2P
(2 PL5)



3710S-1B[1]
(1 Receptacle Bin)



3710S-1C[1]
(1 Collection Box)

6 DOOR HIGH UNITS - STANDARD HEIGHT (ADA Compliant)

23-1/2" H



3706D-10
(10 MB1, OM2)



3706D-09
(9 MB1, OM3)



3706D-05
(5 MB1, 1 PL5, OM2)



3706D-2P
(2 PL6)



3706S-04
(4 MB1, OM2)



3706S-03
(3 MB1, OM3)



3706S-1P
(1 PL6)

DOUBLE COLUMN WIDTH: 31-1/8" W
SINGLE COLUMN WIDTH: 16-3/8" W

MAILBOX DOOR SIZES:

MB1 - 13-1/4" W x 3-1/4" H
MB2 - 13-1/4" W x 6-3/4" H
MB3 - 13-1/4" W x 10-1/4" H
MB4 - 13-1/4" W x 13-3/4" H

PARCEL LOCKER DOOR SIZES:

PL3[2] - 13-1/4" W x 10-1/4" H
PL4[2] - 13-1/4" W x 13-3/4" H
PL4.5 - 13-1/4" W x 15-1/2" H
PL5 - 13-1/4" W x 17-1/4" H
PL6 - 13-1/4" W x 20-3/4" H



OUTGOING MAIL COMPARTMENT (OM2)

Note: Units (excluding stand-alone parcel lockers) include a two (2) door high compartment for outgoing mail collection.



OUTGOING MAIL COMPARTMENT (OM3)

Note: Units (excluding stand-alone parcel lockers) include a two (2) door high compartment for outgoing mail collection. The OM3 adds a fixed panel door directly below the OM2, but does not add extra capacity for mail collection.



OUTGOING MAIL COMPARTMENT (OM1.5)

Note: Both front loading and rear loading units include a one and a half (1.5) door high compartment for outgoing mail collection.



CARRIER ACCESS (CA) DOOR

Note: Carrier Access (CA) doors are only available for stand-alone parcel lockers and private use mailboxes.

Note: Salsbury Recessed Mounted 4C Horizontal Mailboxes and parcel lockers have been U.S.P.S. approved and meet the specifications of USPS-STD-4C and are required for new construction and major renovations.

[1] These units do not meet U.S.P.S. installation requirements and are for private delivery only unless approved by local postal authorities.

[2] For private delivery, unless parcel locker ratio exceeds requirement. U.S.P.S. standard 4C requires a minimum of one parcel locker for every ten (10) tenant compartments. Parcel lockers must be a minimum of 15" high (PL4.5, PL5 and PL6) to meet the 1:10 ratio. Once this ratio has been met, smaller parcel lockers (PL3 and PL4) may also be added.

ustom Recessed Mounted 4C Horizontal Mailbox Configurations

15 DOOR HIGH UNITS - CUSTOM HEIGHT



3715D-20[2]
(20 MB1, 2 PL4, OM2)

3715D-19
(19 MB1, 1 PL4, 1 PL5, OM2)

3715D-18
(18 MB1, 2 PL5, OM2)

3715D-17
(17 MB1, 1 PL5, 1 PL6, OM2)

3715D-16
(16 MB1, 2 PL6, OM2)

3715D-15
(15 MB1, 2 PL6, OM3)

3715D-09
(9 MB2, 2 PL5, OM2)

3715S-09
(9 MB1, 1 PL4, OM2)

3715S-08
(8 MB1, 1 PL5, OM2)

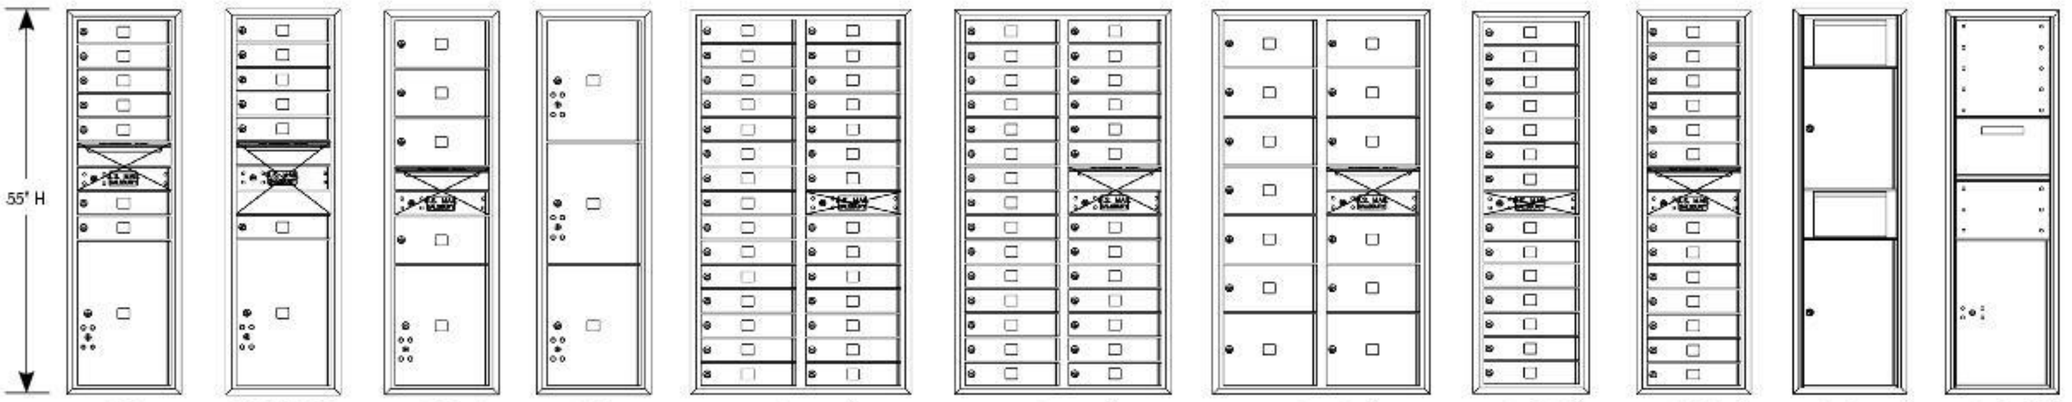

3715S-07
(7 MB1, 1 PL6, OM2)

3715S-06
(6 MB1, 1 PL6, OM3)

3715S-04
(4 MB2, 1 PL5, OM2)

3715S-3P
(3 PL5)

3715D-29[1]
(29 MB1, CA)

3715D-28[1]
(28 MB1, OM2)

3715D-13[1]
(11 MB2, 2 MB3, OM2)

3715S-14[1]
(14 MB1, CA)

3715S-13[1]
(13 MB1, OM2)

3715S-2B[1]
(2 Receptacle Bins)

3715S-1C[1]
(1 Collection Box)

DOUBLE COLUMN WIDTH: 31-1/8" W
SINGLE COLUMN WIDTH: 16-3/8" W

MAILBOX DOOR SIZES:

MB1 - 13-1/4" W x 3-1/4" H
MB2 - 13-1/4" W x 6-3/4" H
MB3 - 13-1/4" W x 10-1/4" H
MB4 - 13-1/4" W x 13-3/4" H

PARCEL LOCKER DOOR SIZES:

PL3[2] - 13-1/4" W x 10-1/4" H
PL4[2] - 13-1/4" W x 13-3/4" H
PL4.5 - 13-1/4" W x 15-1/2" H
PL5 - 13-1/4" W x 17-1/4" H
PL6 - 13-1/4" W x 20-3/4" H

OUTGOING MAIL COMPARTMENT (OM2)

Note: Both front loading and rear loading units (excluding stand-alone parcel lockers) include a two (2) door high compartment for outgoing mail collection.

OUTGOING MAIL COMPARTMENT (OM3)

Note: Both front loading and rear loading units (excluding stand-alone parcel lockers) include a two (2) door high compartment for outgoing mail collection. The OM3 adds a fixed panel door directly below the OM2, but does not add extra capacity for mail collection.

OUTGOING MAIL COMPARTMENT (OM1.5)

Note: Both front loading and rear loading units include a one and a half (1.5) door high compartment for outgoing mail collection.

CARRIER ACCESS (CA) DOOR

Note: Carrier Access (CA) doors are only available for stand-alone parcel lockers and private use mailboxes.

Note: Salsbury Recessed Mounted 4C Horizontal Mailboxes and parcel lockers have been U.S.P.S. approved and meet the specifications of USPS-STD-4C and are required for new construction and major renovations.

[1] These units do not meet U.S.P.S. installation requirements and are for private delivery only unless approved by local postal authorities.

[2] For private delivery, unless parcel locker ratio exceeds requirement. U.S.P.S. standard 4C requires a minimum of one parcel locker for every ten (10) tenant compartments. Parcel lockers must be a minimum of 15" high (PL4.5, PL5 and PL6) to meet the 1:10 ratio. Once this ratio has been met, smaller parcel lockers (PL3 and PL4) may also be added.

ustom Recessed Mounted 4C Horizontal Mailbox Configurations

14 DOOR HIGH UNITS - CUSTOM HEIGHT

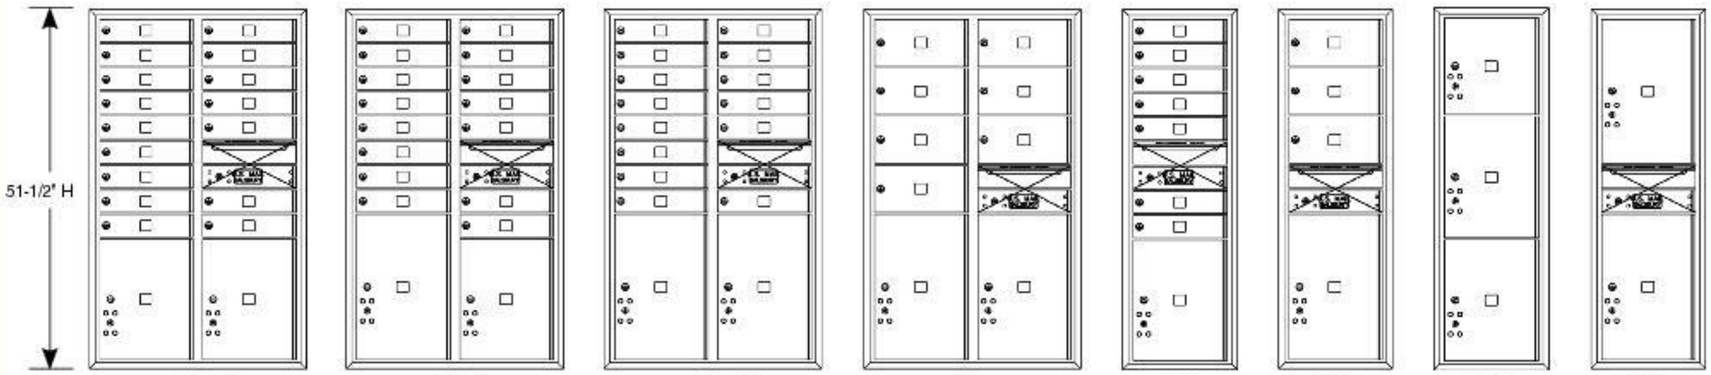

3714D-16
(16 MB1, 2 PL5, OM2)

3714D-15
(15 MB1, 1 PL5, 1 PL6, OM2)

3714D-14
(14 MB1, 2 PL6, OM2)

3714D-07
(7 MB2, 2 PL6, OM2)

3714S-07
(7 MB1, 1 PL5, OM2)

3714S-03
(3 MB2, 1 PL6, OM2)

3714S-3P
(1 PL4, 2 PL5)

3714S-2P
(2 PL6, OM2)

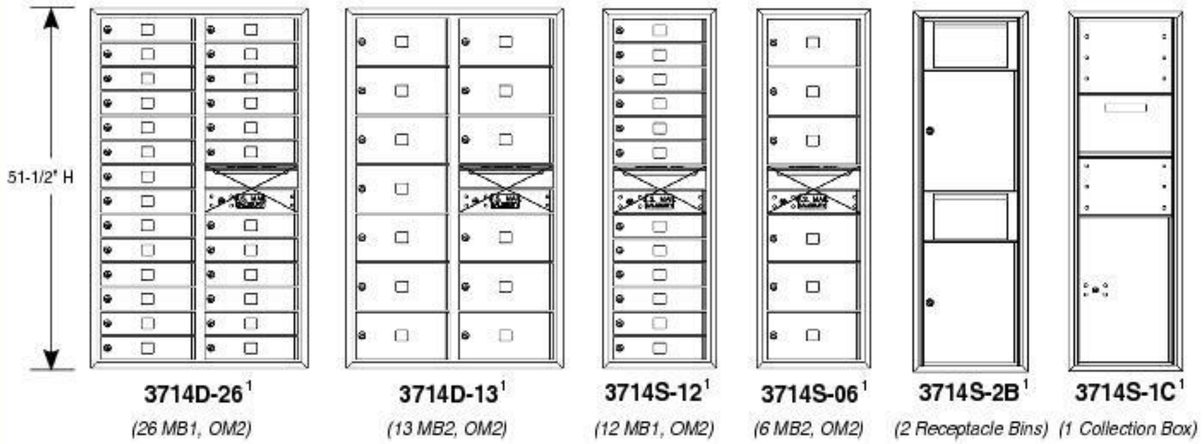

3714D-26[1]
(26 MB1, OM2)

3714D-13[1]
(13 MB2, OM2)

3714S-12[1]
(12 MB1, OM2)

3714S-06[1]
(6 MB2, OM2)

3714S-2B[1]
(2 Receptacle Bins)

3714S-1C[1]
(1 Collection Box)

13 DOOR HIGH UNITS - CUSTOM HEIGHT

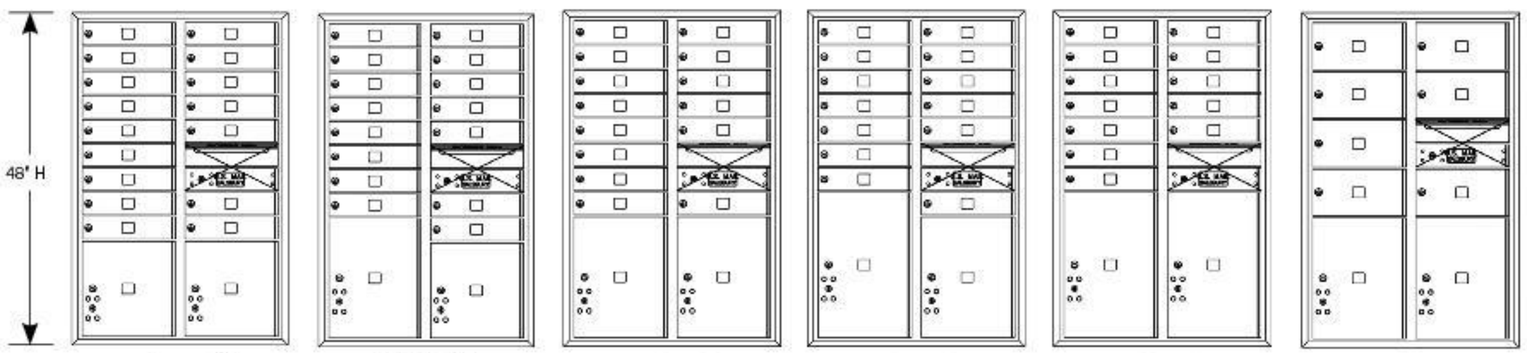

3713D-16[2]
(16 MB1, 2 PL4, OM2)

3713D-15
(15 MB1, 1 PL4, 1 PL5, OM2)

3713D-14
(14 MB1, 2 PL5, OM2)

3713D-13
(13 MB1, 1 PL5, 1 PL6, OM2)

3713D-12
(12 MB1, 2 PL6, OM2)

3713D-07
(7 MB2, 2 PL5, OM2)

DOUBLE COLUMN WIDTH: 31-1/8" W
SINGLE COLUMN WIDTH: 16-3/8" W

MAILBOX DOOR SIZES:

MB1 - 13-1/4" W x 3-1/4" H
MB2 - 13-1/4" W x 6-3/4" H
MB3 - 13-1/4" W x 10-1/4" H
MB4 - 13-1/4" W x 13-3/4" H

PARCEL LOCKER DOOR SIZES:

PL3[2] - 13-1/4" W x 10-1/4" H
PL4[2] - 13-1/4" W x 13-3/4" H
PL4.5 - 13-1/4" W x 15-1/2" H
PL5 - 13-1/4" W x 17-1/4" H
PL6 - 13-1/4" W x 20-3/4" H

OUTGOING MAIL COMPARTMENT (OM2)

Note: Both front loading and rear loading units (excluding stand-alone parcel lockers) include a two (2) door high compartment for outgoing mail collection.

OUTGOING MAIL COMPARTMENT (OM3)

Note: Both front loading and rear loading units (excluding stand-alone parcel lockers) include a two (2) door high compartment for outgoing mail collection. The OM3 adds a fixed panel door directly below the OM2, but does not add extra capacity for mail collection.

OUTGOING MAIL COMPARTMENT (OM1.5)

Note: Both front loading and rear loading units include a one and a half (1.5) door high compartment for outgoing mail collection.

CARRIER ACCESS (CA) DOOR

Note: Carrier Access (CA) doors are only available for stand-alone parcel lockers and private use mailboxes.

Note: Salsbury Recessed Mounted 4C Horizontal Mailboxes and parcel lockers have been U.S.P.S. approved and meet the specifications of USPS-STD-4C and are required for new construction and major renovations.

[1] These units do not meet U.S.P.S. installation requirements and are for private delivery only unless approved by local postal authorities.

[2] For private delivery, unless parcel locker ratio exceeds requirement. U.S.P.S. standard 4C requires a minimum of one parcel locker for every ten (10) tenant compartments. Parcel lockers must be a minimum of 15" high (PL4.5, PL5 and PL6) to meet the 1:10 ratio. Once this ratio has been met, smaller parcel lockers (PL3 and PL4) may also be added.

ustom Recessed Mounted 4C Horizontal Mailbox Configurations

13 DOOR HIGH UNITS - CUSTOM HEIGHT

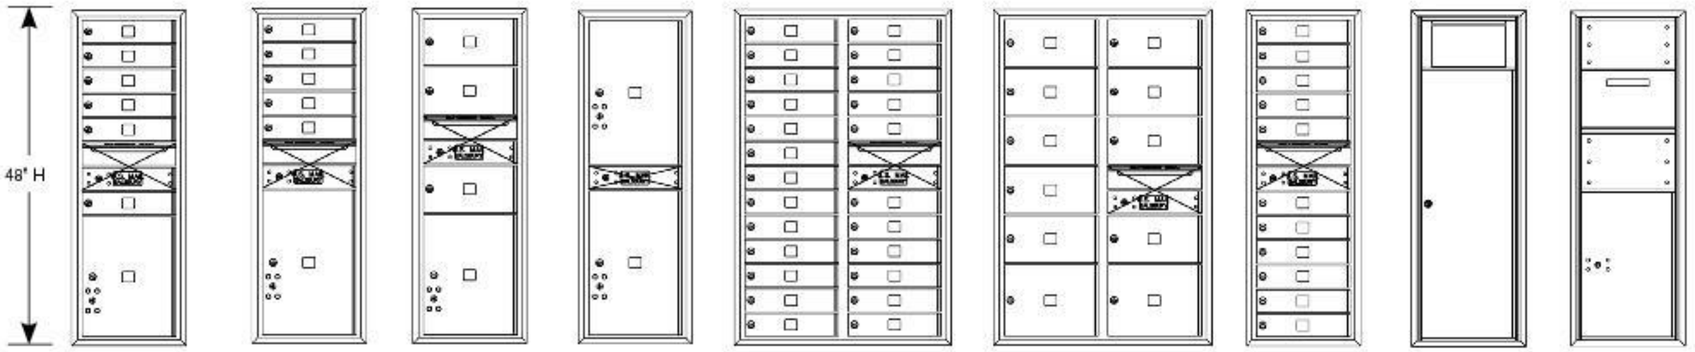

3713S-06
(6 MB1, 1 PL5, OM2)

3713S-05
(5 MB1, 1 PL6, OM2)

3713S-03
(3 MB2, 1 PL5, OM2)

3713S-2P
(2 PL6, CA)

3713D-24[1]
(24 MB1, OM2)

3713D-11[1]
(9 MB2, 2 MB3, OM2)

3713S-11[1]
(11 MB1, OM2)

3713S-1B[1]
(1 Receptacle Bin)

3713S-1C[1]
(1 Collection Box)

12 DOOR HIGH UNITS - CUSTOM HEIGHT

3712D-12
(12 MB1, 2 PL5, OM2)

3712D-11
(11 MB1, 1 PL5, 1 PL6, OM2)

3712D-10
(10 MB1, 2 PL6, OM2)

3712D-05
(5 MB2, 2 PL6, OM2)

3712D-4P
(4 PL6)

3712S-02
(2 MB2, 1 PL6, OM2)

3712S-2P
(2 PL6)

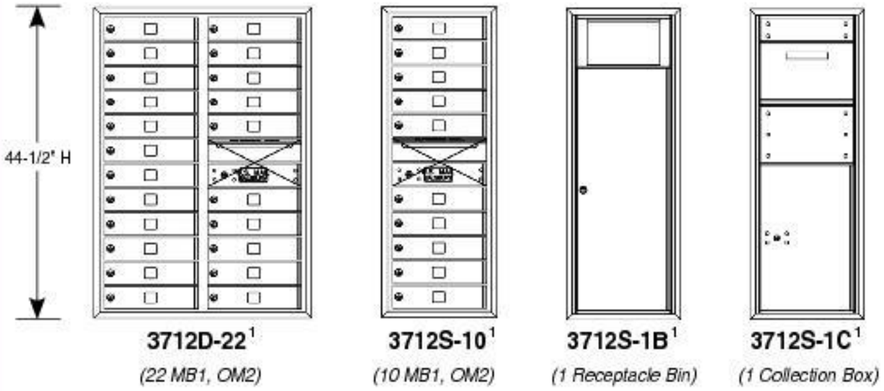

3712D-22[1]
(22 MB1, OM2)

3712S-10[1]
(10 MB1, OM2)

3712S-1B[1]
(1 Receptacle Bin)

3712S-1C[1]
(1 Collection Box)

DOUBLE COLUMN WIDTH: 31-1/8" W
SINGLE COLUMN WIDTH: 16-3/8" W

MAILBOX DOOR SIZES:

MB1 - 13-1/4" W x 3-1/4" H
MB2 - 13-1/4" W x 6-3/4" H
MB3 - 13-1/4" W x 10-1/4" H
MB4 - 13-1/4" W x 13-3/4" H

PARCEL LOCKER DOOR SIZES:

PL3[2] - 13-1/4" W x 10-1/4" H
PL4[2] - 13-1/4" W x 13-3/4" H
PL4.5 - 13-1/4" W x 15-1/2" H
PL5 - 13-1/4" W x 17-1/4" H
PL6 - 13-1/4" W x 20-3/4" H



OUTGOING MAIL COMPARTMENT (OM2)

Note: Both front loading and rear loading units (excluding stand-alone parcel lockers) include a two (2) door high compartment for outgoing mail collection.



OUTGOING MAIL COMPARTMENT (OM3)

Note: Both front loading and rear loading units (excluding stand-alone parcel lockers) include a two (2) door high compartment for outgoing mail collection. The OM3 adds a fixed panel door directly below the OM2, but does not add extra capacity for mail collection.



OUTGOING MAIL COMPARTMENT (OM1.5)

Note: Both front loading and rear loading units include a one and a half (1.5) door high compartment for outgoing mail collection.



CARRIER ACCESS (CA) DOOR

Note: Carrier Access (CA) doors are only available for stand-alone parcel lockers and private use mailboxes.

Note: Salsbury Recessed Mounted 4C Horizontal Mailboxes and parcel lockers have been U.S.P.S. approved and meet the specifications of USPS-STD-4C and are required for new construction and major renovations.

[1] These units do not meet U.S.P.S. installation requirements and are for private delivery only unless approved by local postal authorities.

[2] For private delivery, unless parcel locker ratio exceeds requirement. U.S.P.S. standard 4C requires a minimum of one parcel locker for every ten (10) tenant compartments. Parcel lockers must be a minimum of 15" high (PL4.5, PL5 and PL6) to meet the 1:10 ratio. Once this ratio has been met, smaller parcel lockers (PL3 and PL4) may also be added.

ustom Recessed Mounted 4C Horizontal Mailbox Configurations

9 DOOR HIGH UNITS - CUSTOM HEIGHT

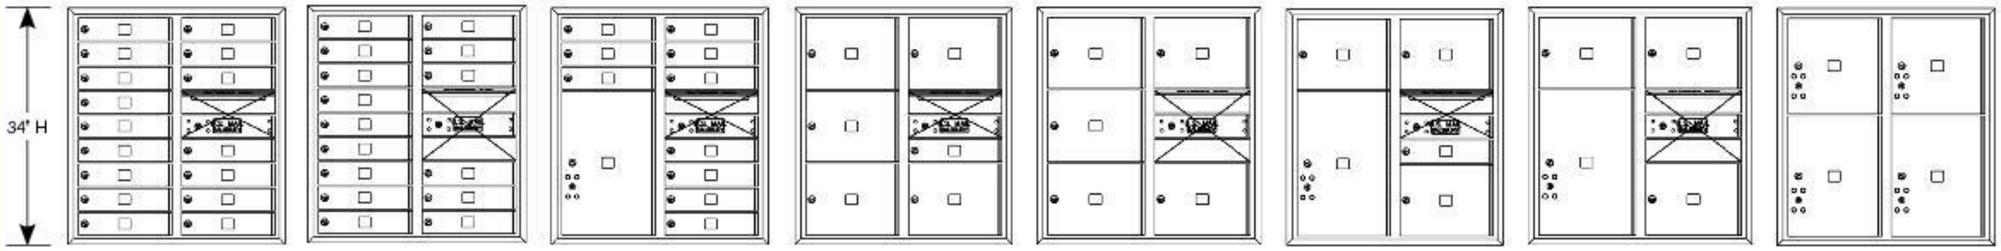

3709D-16 *(16 MB1, OM2)*

3709D-15 *(15 MB1, OM3)*

3709D-10 *(10 MB1, 1 PL6, OM2)*

3709D-06 *(1 MB1, 5 MB3, OM2)*

3709D-05 *(5 MB3, OM3)*

3709D-04 *(1 MB1, 3 MB3, 1 PL6, OM2)*

3709D-03 *(3 MB3, 1 PL6, OM3)*

3709D-4P *(2 PL4, 2 PL5)*

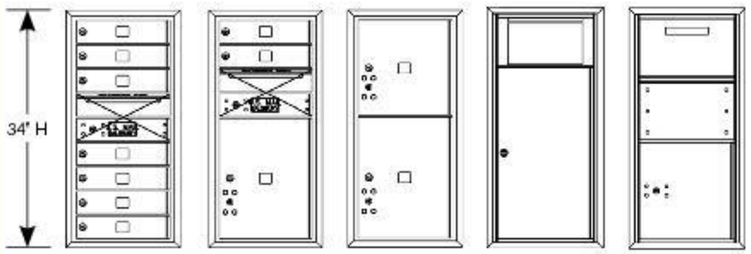

3709S-07 *(7 MB1, OM2)*

3709S-02 *(2 MB1, 1 PL5, OM2)*

3709S-2P *(1 PL4, 1 PL5)*

3709S-1B[1] *(1 Receptacle Bin)*

3709S-1C[1] *(1 Collection Box)*

8 DOOR HIGH UNITS - CUSTOM HEIGHT

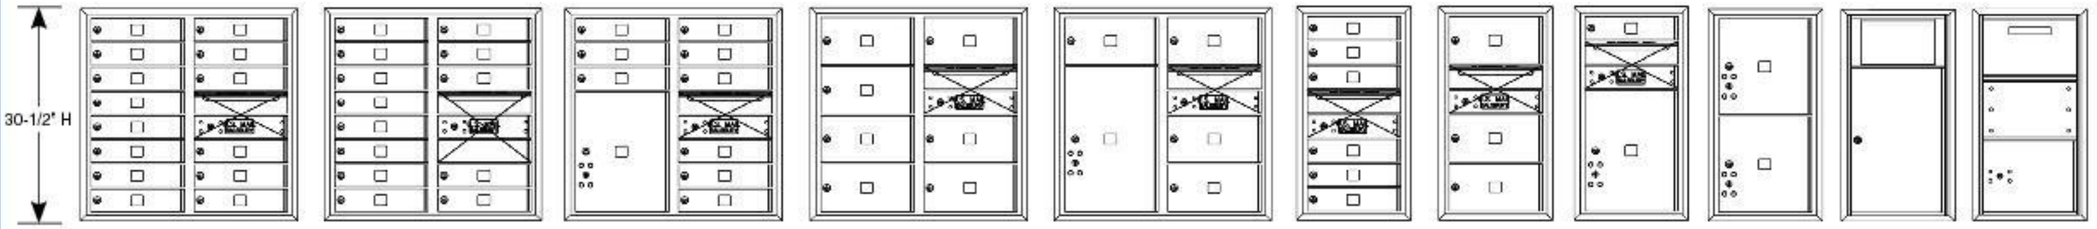

3708D-14 *(14 MB1, OM2)*

3708D-13 *(13 MB1, OM3)*

3708D-09 *(9 MB1, 1 PL5, OM2)*

3708D-07 *(7 MB2, OM2)*

3708D-04 *(4 MB2, 1 PL6, OM2)*

3708S-06 *(6 MB1, OM2)*

3708S-03 *(3 MB2, OM2)*

3708S-01 *(1 MB1, 1 PL5, OM2)*

3708S-2P[2] *(2 PL4)*

3708S-1B[1] *(1 Receptacle Bin)*

3708S-1C[1] *(1 Collection Box)*

7 DOOR HIGH UNITS - CUSTOM HEIGHT

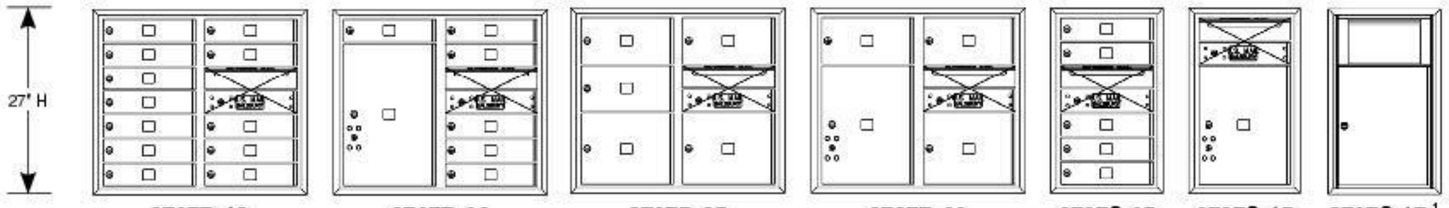

3707D-12 *(12 MB1, OM2)*

3707D-06 *(6 MB1, 1 PL6, OM2)*

3707D-05 *(3 MB2, 2 MB3, OM2)*

3707D-03 *(2 MB2, 1 MB3, 1 PL5, OM2)*

3707S-05 *(5 MB1, OM2)*

3707S-1P *(1 PL5, OM2)*

3707S-1B[1] *(1 Receptacle Bin)*

DOUBLE COLUMN WIDTH: 31-1/8" W
SINGLE COLUMN WIDTH: 16-3/8" W

MAILBOX DOOR SIZES:

MB1 - 13-1/4" W x 3-1/4" H
MB2 - 13-1/4" W x 6-3/4" H
MB3 - 13-1/4" W x 10-1/4" H
MB4 - 13-1/4" W x 13-3/4" H

PARCEL LOCKER DOOR SIZES:

PL3[2] - 13-1/4" W x 10-1/4" H
PL4[2] - 13-1/4" W x 13-3/4" H
PL4.5 - 13-1/4" W x 15-1/2" H
PL5 - 13-1/4" W x 17-1/4" H
PL6 - 13-1/4" W x 20-3/4" H

OUTGOING MAIL COMPARTMENT (OM2)

Note: Both front loading and rear loading units (excluding stand-alone parcel lockers) include a two (2) door high compartment for outgoing mail collection.

OUTGOING MAIL COMPARTMENT (OM3)

Note: Both front loading and rear loading units (excluding stand-alone parcel lockers) include a two (2) door high compartment for outgoing mail collection. The OM3 adds a fixed panel door directly below the OM2, but does not add extra capacity for mail collection.

OUTGOING MAIL COMPARTMENT (OM1.5)

Note: Both front loading and rear loading units include a one and a half (1.5) door high compartment for outgoing mail collection.

CARRIER ACCESS (CA) DOOR

Note: Carrier Access (CA) doors are only available for stand-alone parcel lockers and private use mailboxes.

Note: Salsbury Recessed Mounted 4C Horizontal Mailboxes and parcel lockers have been U.S.P.S. approved and meet the specifications of USPS-STD-4C and are required for new construction and major renovations.

[1] These units do not meet U.S.P.S. installation requirements and are for private delivery only unless approved by local postal authorities.

[2] For private delivery, unless parcel locker ratio exceeds requirement. U.S.P.S. standard 4C requires a minimum of one parcel locker for every ten (10) tenant compartments. Parcel lockers must be a minimum of 15" high (PL4.5, PL5 and PL6) to meet the 1:10 ratio. Once this ratio has been met, smaller parcel lockers (PL3 and PL4) may also be added.